


Cable Specifications for Electric Lock Devices

Construction Details:

Number of Conductors: 2/C
 Conductor: 18AWG Stranded Bare Copper
 Insulation Material: Polyvinyl Chloride
 Nominal Insulation Thickness: 0.008 in.
 Nominal Insulation Diameter: 0.062 in.
 Color Code: Black, Red
 Jacket Material: Polyvinyl Chloride
 Nominal Jacket Thickness: 0.015 in.
 Nominal Diameter: 0.154 in.
 Surface Print: 3122598 CMR 18AWG C(ETL)US
 FT4 A B C D E F 0 1 2 3 4 5 6 7 8
 9...SUITABLE FOR OUTDOOR
 USE + Sequential Footage Marking

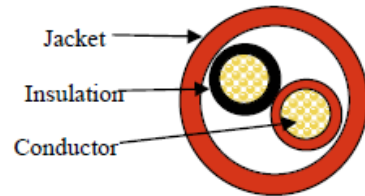

Standards:

- NEC Article 800
- UL Subject 444, CMR FT4

Electricals:

Suggested Working Voltage: 300 Volts, rms.

Codes & Listings:

- C(ETL)US

Technical Details:

Temperature Rating	Operation	-20°C to +60°C.
Nominal Weight:	17 lbs. / 1,000 feet	

Preparation for Shipment:

The cable shall be packaged to preclude the inducement of damage due to handling and transportation, and shall be in accordance with the best commercial practices available. Shipping containers shall be constructed as to eliminate any possible damage to the cables due to shipment.

